



PoolPaintonline
.com.au

TWO COMPONENT, HIGH BUILD EPOXY SWIMMING POOL COATING

DESCRIPTION:


Two component, high build, epoxy coating - Gloss.
Specifically designed for use in underwater / aquatic applications.

COLOURS:

Wide range of colours (25) - Colour card available.
Special "custom tinted" colours available on request.

RECOMMENDED AREAS OF APPLICATION:

- Domestic, commercial & public swimming pools.
- Walls & floors subject to constant splash & spillage of water and / or process chemicals (eg. dairies, piggeries, breweries, kitchens, toilets/washrooms, saunas, laundries, etc...).
- Aquatic animal enclosures & water features (fountains, ponds, fontenals, etc..).

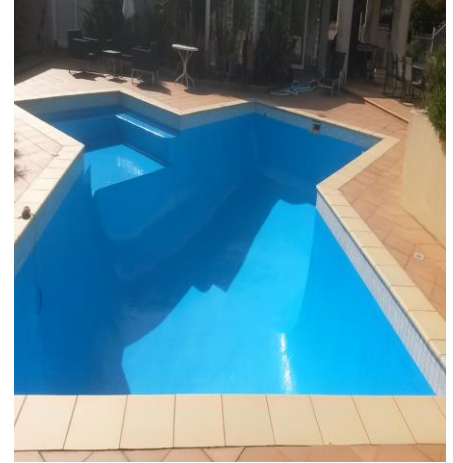

FEATURES:

- High Build (greater film build per coat / less coats needed), greater durability in heavy traffic areas.
- Cures down to 10°C (low temperature winter hardener) / Ready to refill in a minimum of 96 hours @ 25°C
- Resistant to a wide range of chemicals.
- Long Term Protection – up to ten (10) years for domestic pools and five (5) years for public / commercial (dependent on colour, traffic and care / chemical balance/ maintenance of swimming pool.)
- Easy to apply by roller or brush - two (2) coat system (re-paint) / three coats (new surfaces/ heavy wear areas)

SPECIFICATION DATA:

Please refer to us for a detailed specification for your specific application. Full application instructions available.

T E C H N I C A L D A T A

COVERING CAPACITY:

6 - 8 m² per / Lt (surface dependent)

VOLUME SOLIDS:

95% approx. Volume Solids.

DRYING TIME:

Re-coatable in 12 - 18 hours @ 20°C

POTLIFE:

1 hr. approx. @ 20°C

THINNERS:

Use Luxapool® epoxy thinner ONLY

MIXING RATIO:

2.5 to 1 (Base to Hardener) by volume

INDUCTION TIME:

15 minutes @ 20°C

VOC RATING:

53grams / per litre (Mixed material)

SAFETY DATA:

Flammable: store and use away naked flame or excessive heat.
Wear rubber or PVC gloves when using / can cause an allergic reaction.
Provide good ventilation during application.

Please refer MSDS for further information available on-line.



PACKAGING AVAILABLE:

- # 1lt kits (715ml base to 285ml hardener)
- # 3.5lt kits. (2.5lt base / 1lt hardener)
- # 17.5lt kits available for large commercial applications only.

I M P O R T A N T N O T E / D I S C L A I M E R :

ALL MATERIALS ARE SUPPLIED TO COMMERCIAL & DOMESTIC CLIENTS STRICTLY UNDER THE FOLLOWING CONDITIONS - SINCE CONDITIONS OF USE AND THE COMPETENCE OF THE APPLICATOR ARE TOTALLY BEYOND OUR CONTROL, WE ASSUME NO RESPONSIBILITY OR LIABILITY IN CONNECTION WITH THE USE OF THE PRODUCT RELATIVE TO COVERAGE, OVERALL PERFORMANCE, LOSS OF INCOME OR INJURY. IF ANY FAILURE OR PROBLEM ARISE, D.P.J. COATING SYSTEMS PTY LTD ARE NOT OBLIGED BY LAW TO ATTEND ON SITE OR TO PROVIDE ANY REMEDY WHATSOEVER, AND IT WOULD BE YOUR RESPONSIBILITY TO PROVE THAT ANY FAILURE IS THE RESPONSIBILITY OF THE COATING MANUFACTURER.



D P J C O A T I N G S S Y S T E M S Pty Ltd

Head Office: 2/25 Jersey Road, Bayswater. Vic Ph: (03) 9720 8777 Fax: (03) 9720 8540 Email: sales@poolpaintonline.com.au

w w w . p o o l p a i n t o n l i n e . c o m . a u